


# TECHNICAL DATA

## THE 15 PRO PASSIVE ON WALL

  
**Ascendo**  
ELEVATE YOUR SOUND



Speaker Type	15" time-coherent point-source coaxial
Principle	Vented
Passive   Active	Passive
Woofers	15" woofer
Tweeter	3" voice coil diameter, compression driver
Recommended ASCENDO Amplifiers	AIA2-2704, AIA2-6004, AIA4-2404, AIA4-6004, AIA8-6004
SPL (Peak / half space 2pi)	Calculated Data 125 dB (Cont.) / 135 dB (Peak) 122 dB @ 60 Hz 112 dB @ 40 Hz
Frequency Range	Calculated Data 70 Hz - 21 kHz / -3dB
Efficiency	90 dB / 1 W/m 4 pi, 96 dB / 1 W/m 2 pi
Power Handling	900 W
Impedance	8 $\Omega$
Directivity Horizontal x Vertical in deg°	85° x 85°
Input Terminal	Neutrik Speakon

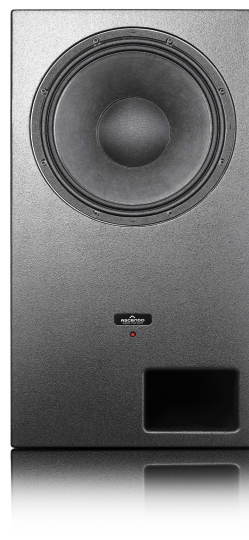

Enclosure	Internally braced birch ply and MDF
Dimensions (W/H/D)mm (Without grille)	470   870   240 (With grille: 250.2)
Dimensions (W/H/D)inch (Without grille)	18 1/2   34 1/4   9 7/16 (With grille: 9 7/8)
Packing Dimensions (W/H/D)mm	340   970   550
Packing Dimensions (W/H/D)inch	13 6/16   38 3/16   21 10/16
Weight	78.26 lbs   35.50 kg
Gross Weight	89.28 lbs   40.50 kg
Finish	Structural paint black
Mounting	3 x wall brackets for horizontal and vertical installation, VESA 200 x 200 mounting option

The THE15 PRO PASSIVE ON WALL is supplied with a front cover as standard



Technical modifications subject to change without further notice | Technische Änderungen vorbehalten