


TECHNICAL DATA

THE 6 PASSIVE NARROW

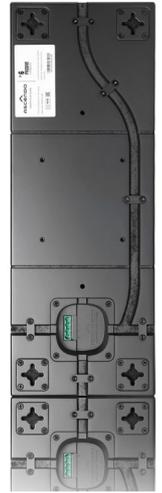

Speaker Type	6 1/2" time-coherent point-source coaxial
Principle	Vented
Passive Active	Passive
Woofer	6 1/2" woofer
Tweeter	1" soft dome
Recommended ASCENDO Amplifiers	AIA2-1404, AIA4-2404, AIA8-2704, AIA8-6004
SPL (Peak / half space 2pi)	Measured Data 111 dB (Cont.) / 122 dB (Peak) 108 dB @ 100 Hz 113 dB @ 170Hz
Frequency Range	Measured Data (Without DSP) 110 Hz - 20 kHz / -3dB
Efficiency	87 dB / 1 W/m 4 pi, 93 dB / 1 W/m 2 pi
Power Handling	200 W
Impedance	8 Ω
Directivity Horizontal x Vertical in deg°	85° x 85°
Input Terminal	4-conductor Phoenix 12 AWG (3.3 mm ²)

Enclosure	Internally braced MDF
Dimensions (W/H/D)mm (Without grille)	495 180 88 (With grille: 94)
Dimensions (W/H/D)inch (Without grille)	19 1/2 7 1/16 3 7/16 (With grille: 3 11/16)
Packing Dimensions (W/H/D)mm	300 610 200
Packing Dimensions (W/H/D)inch	13 24 7 14/16
Weight	10.58 lbs 4.8 kg
Gross Weight	13.23 lbs 6.0 kg
Finish	Matte black / White glossy
Mounting	4 x wall brackets for horizontal and vertical installation, 2 through-holes for direct wall or ceiling mounting

The THE6 PASSIVE NARROW is supplied with a front cover as standard



Technical modifications subject to change without further notice | Technische Änderungen vorbehalten